

- **Easy to Use**
- **Fully Illuminated**
- **Convenient to Carry**
- **Durable and Sturdy**



LUNA Diffuser Balloon Light

LUNA Diffuser Balloon Light, Pentapod Stand with 3-stage mast assembly. With its powerful LED system and 3-position dimmer design, this unit provides optimum glare-free lighting to a host of construction, quick response, and specialist needs.

For more information, please visit our website:
www.super-empower.com



"WE EMPOWER WATT MATTERS"



ABOUT OUR LUNA

LUNA Diffuser Balloon Light

EASY TO USE FULLY ILLUMINATED CONVENIENT TO CARRY DURABLE AND STURDY



Flexible Range of Visibility

- Optional illuminance settings—3-stage dimming controls (100W, 180W, 250W)
- 30,000 lumens (250W), 21,600 lumens (180W), 12,000 lumens (100W)
- The diffused light can eliminate glare and make night work safer and easier on the eyes.



Heavy Duty Guarantee

- IP65 waterproof, durable for outdoor uses or wet areas.
- Long life hours, low maintenance—Up to 40,000 hours of operating life per LED chip



Clean, Quiet & Environmentally Friendly

- Environmentally economically smart—LED reduces operating costs and CO² emissions by up to 85%



Easy Deploy & Move

- The tool bag is designed for portable applications and is easy to carry.



Lower Costs

- No trenching, cabling, electricity nor diesel costs
- Zero emission of greenhouse gases



LUNA DIFFUSER BALLOON LIGHT

UP 30,000 Lumen

OPTIONAL MOUNTING

EYEBOLT




CARBINER



PENTAPOD STAND



DIMMABLE LUMEN OUTPUT

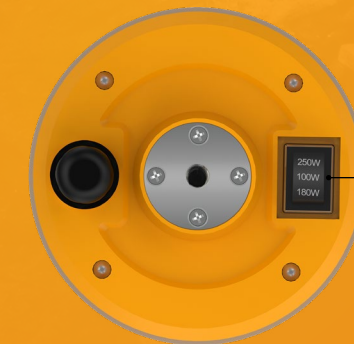


At the bottom of the light head, it has one-button-control dimmable lumen output which from 100W to 250W.

FEATURED ACCESSORIES

(NOT INCLUDED)



Powerplay Portable Power Bank
600W | 1000W | 1500W



Portable Solar Power Charging Panel
100W | 200W

DIMENSIONAL DRAWINGS

LUNA Diffuser Balloon Light



SPECIFICATIONS & PERFORMANCE

LUNA Diffuser Balloon Light

SPECIFICATIONS	LUNA
POWER	100W 180W 250W
LUMEN	12,000lm 21,600lm 30,000lm
VOLTAGE	100-277VAC 50-60Hz
WATERPROOF RATE	IP65
WARRANTY	5 Years
CERTIFICATE	CUL/UL/FCC/CE/ROHS
STANDARD CABLE LENGTH	16 ft
ILLUMINATION RADIUS	75 ft
LAMP LIFE	40,000 Hrs
WEIGHT	32.6 lb
CCT	3,000-5,000K

PRODUCT NUMBER BUILDER

LUNA 250W STL-LUNA-250