



Lithium-Ion Battery
25.6V 100Ah
2,560WH


INSTALLATION AND OPERATION GUIDE

APPLICATIONS


- Outdoor Recreation
- AGM Batteries Replacement
- Power Backup

www.super-empower.com


—PACKING LIST




Battery x 1



Screw x 4



Specification x 1



Plastic Insulation Cap x 2

THANK YOU!

Dear Valued Customer,

Thank you for choosing SUPER EMPOWER® batteries. We greatly appreciate your support. Our team works diligently behind the scenes to create advanced battery systems and provide top-notch service to our customers. Support and feedback from our customers along with the hard work and dedication of our staff allow us to deliver exceptional products, competitive prices, and an overall excellent experience.

Thanks again for giving us your vote of confidence. We hope that you'll enjoy using our products as much as we've enjoyed creating them.

Please feel free to reach out to us if you have any questions.

—CAUTION

Disclaimer

The manufacturer accepts no liability for any damage caused by:
Force majeure includes fire, typhoon, flood, earthquake, war, and terrorism.

Intentional or accidental misuse, abuse, neglect or improper maintenance, and use under abnormal conditions.

Improper installation, improper operation, and malfunction of a peripheral device.

Contamination with hazardous substances, diseases, vermin, or radiation.

Alterations to the product without express written consent from the manufacturer.

—IMPORTANT SAFETY INSTRUCTION

- **Please keep the battery away from heat sources, sparks, flames, and hazardous chemicals.**

- **Maintain Adequate Ventilation and Heat Dissipation**

Place the battery in a well-ventilated area with sufficient heat dissipation to prevent overheating and damage.

- **Size the Battery Cables and Connectors Appropriately**

Use high-stranded copper connectors and heavy gauge cables to handle possible battery loads. Make sure to keep identical cable lengths. Avoid accidents caused by unsuitable connectors or cables that make the connection a heat source during battery operation.

- **Please tighten all cable connections, as loose cable connections can cause terminal meltdown or fire.**

- **DO NOT puncture, drop, crush, burn, penetrate, shake, or strike the battery.**

The battery should be securely fastened during handling to prevent impact or dropping. It should be safely secured to a solid plane and the cables safely tied to a suitable location to avoid arcing and sparking due to friction.

- **DO NOT press it by placing heavy stuff on top of it for long periods, which may damage it due to an internal short circuit.**
- **DO NOT immerse the battery in water whether the battery is in use or on standby.**
- **DO NOT open, dismantle, or modify the battery.**
- **DO NOT touch the exposed electrolyte or powder if the battery casing is damaged.**
- **Uncovered electrolyte or powder that has contacted the skin or eyes MUST be flushed out with plenty of clean water immediately. Seek medical attention afterward.**
- **Avoid Short Circuit**

Please use circuit breakers, fuses, or disconnects that have been properly sized by certified electricians licensed installers or regional code authorities to protect all the electrical equipment in your system. The battery has a built-in battery management system (BMS) that protects the battery cells from over-charge, over-discharge, and over-current, however this alone will not protect your system from severe electrical conditions.

- **Trained and certified technicians are required for safe and reliable installation. This product manual can only serve as a guideline as it cannot cover all possible scenarios**
- **Verify Correct Polarity**
Please verify the polarity before connecting the wiring. Reverse polarity can and will destroy the battery and other electrical equipment. Use a multimeter to determine proper polarity.
- **Avoid Exposed Metal Terminals or Connectors**
The terminals of this battery are always live. Avoid exposed metal terminals or connectors; DO NOT place tools on the terminals or touch them with bare hands; DO NOT short circuit or use outside of specified electrical ratings.
- **DO NOT dispose of the battery as household waste. Please use recycling channels in accordance with local, state, and federal regulations.**

—WARNING

- Batteries are potentially dangerous and proper precautions must be taken during operation and maintenance.
- Improper use of the battery can lead to battery failure or other potential damage.
- Improper configuration, installation, or use of related equipment in the battery system may damage the battery and other related equipment.
- Please wear proper personal protective equipment when working on the battery.
- Battery installation and maintenance must be performed by trained and certified technicians.
- Failure to follow the warnings above can result in potential damage.

If you have any questions or need any help, please feel free to contact us at hello@super-empower.com.

CONTENTS

PRODUCT OVERVIEW	07
CHARGE-DISCHARGE CURVE	08
PRODUCT SPECIFICATIONS	09
CHARGING	11
INSTALLATION GUIDE	12
BMS FUNCTION	15
APPLICATION EXAMPLES	16
FAQS	17
WARRANTY AND RETURNS	18

—PRODUCT OVERVIEW

Key Features


- Lithium Ion Phosphate(LiFePO₄)chemistry provides exceptional stability and consistent performance.
- Advanced Battery Management System (BMS) ensures product safety and long lifespan.
- Supports fast charging and discharging
- Constant voltage and full usable capacity at any state of charge.
- IP67 Rated (Dust and Water Resistant)
- Grade UL94 V-0 (Fireproof)

External Features



—CHARGE-DISCHARGE CURVE

Charge-discharge Curve @ 77°F/25°C

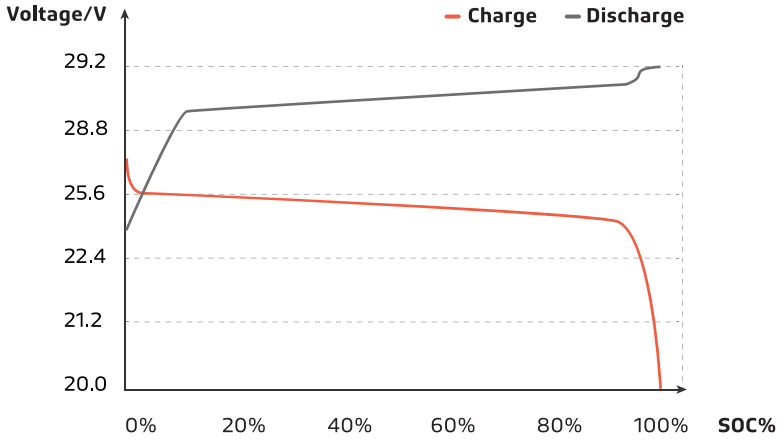


Sample: 25.6V 100Ah battery

*Environmental conditions required for all tests: 77±9°F/25±5°C

Connection Diagram

Note: for a 25.6V 100Ah battery, the usage is the same for other models.

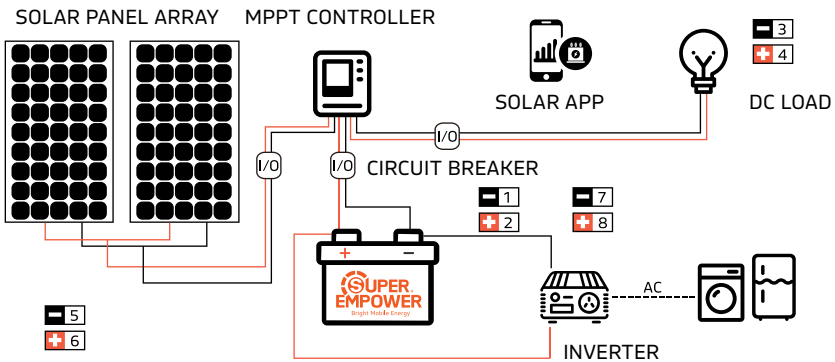

—PRODUCT SPECIFICATIONS

Battery Management System (BMS) Warning and Protection

Over-charge Voltage Protection	28.8±0.2V
Over-charge Voltage Protection Release	28.8±0.2V
Over-discharge Voltage Protection	18.4±0.24V
Over-discharge Voltage Protection Release	21.6±0.24V
Over-current Discharge Protection	300±50A
Over-current Charge Protection	130±20A
Short Circuit Current Protection	Support
Release Condition	Cut Load
Charging High Temperature Protection	149±41°F
Discharge High Temperature Protection	158±41°F
High Temperature Protection Release Condition	Drop by 50±41°F
Charging Low Temperature Protection	32±41°F
Discharge Low Temperature Protection	-4±41°F
Temperature Protection Release Condition	Rise by 50±41°F

—PRODUCT SPECIFICATIONS

Battery Parameters

Product	25.6V 100AH
Weight(lbs)	41.6
Dimensions(inch)	21.0x8.1x8.5
Terminal Bolt Size	M8
Rated Voltage	25.6V
Standard Charging Voltage	28.8V±0.4V
Shipping Voltage	25.6V to 28.8V
Shipping Capacity	50%
Cycle Life	6000@80% DoD
Self Discharge Rate	≤3%/Month
Series & Parallel connections	4 Parallel (Max) 2 Series (Max)
Communications	Not Supported
Case Material	ABS+PC/UL94-V0
Waterproof Grade	IP65
Battery Pack Certifications	CE/UN38.3/Class 9/IEC62133/ROHS
Cell Certifications	UL1642/UL2580/UN38.3
Storage Temperature	32°F to 140°F

—CHARGING

Charging with AC-DC Battery Charger

Check the AC-DC battery charger you intend to use has a dedicated lithium charge setting that meets the below charging requirements. A lot of battery chargers are designed for charging lead-acid batteries only and may not have a suitable charge setting for LiFePO_4 battery.

Charging Tips:

Use a 25.6V LiFePO_4 battery charger

Recommended Charging Voltage: $25.6\text{V}\pm0.4\text{V}$

Recommended Charging Current:

Charging Current \ Battery Model	25.6V 100AH
20A	5 Hrs
100A	1 Hrs

—INSTALLATION GUIDE

Installation Environment

The battery should be installed in a clean, cool, and dry place, away from water, oil, and dirt. The accumulation of these substances on the battery may cause leakage, resulting in self-discharge and possible short circuits. Adequate ventilation must be maintained to prevent the battery from overheating, and temperature fluctuations between the batteries should be minimized as much as possible.

Preparation

Before installing and handling the battery, it is recommended that the following equipment or tools be available:

- Proper insulation protection equipment and tools
- Multimeter, battery cables
- Battery Charger/Charge Controller

Inspection

Check for visible damage, including cracks, dents, deformations, and other visible anomalies. The top of the battery and terminal connections should be clean, dry and free of dirt and corrosion. If you find any problem with the battery, please contact us for assistance.

- 1. DO NOT short the battery terminals, as doing so may cause a current burst leading to irreversible damage to the system and battery.**
- 2. Please check the polarity before wiring. Polarity reversal will damage the battery.**
3. Protect all electrical equipment with circuit breakers, fuses, or appropriately sized circuit breakers as specified by a qualified electrician, licensed installer or regional regulatory authority.

Cable Size

Cable size should be selected based on the expected load. Refer to the table below for the amperage of copper cables of different sizes.

Cable Specification and Capacity (AWG/MM²)	Current Capacity (A)
14(2.08)	20
12(3.31)	25
10(5.25)	35
8(8.26)	50
6(13.3)	65
4(21.1)	85
2(33.6)	115
1(42.4)	130
1/0(53.5)	150
2/0(67.4)	175
4/0(107)	230

Best Practice Guidelines

- 1. Same brand
(DO NOT connect any other brand, LiFePO_4 battery due to differences in the BMS)
- 2. Same battery type(LiFePO_4)
(DO NOT connect any other battery type with this battery—such as li-ion, SLA etc.)
- 3. Same voltage, it is recommended to use the battery fully charged (25.6V).
- 4. Same capacity
- 5. The two batteries should be no more than 3 months older than each other.

—INSTALLATION GUIDE

Connection Steps

STEP 1. Fully charge the battery separately


STEP 2. Wait 15 mins then test the voltage, it should be $>25V$

STEP 3. Connect your batteries in series or/and in parallel

(Taking a 24V 100Ah battery as an example)


Series Connection

25.6V 100Ah

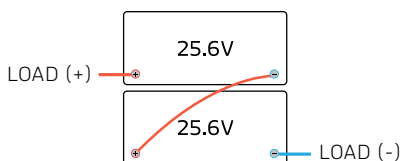

Parallel Connection

25.6V 100Ah

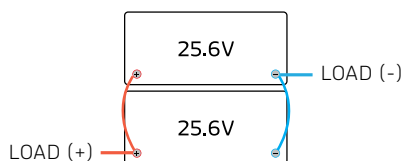

Note: If you need to connect 2 or more 25.6V batteries in series, please prepare a battery equalizer for balancing charge. Or you should charge them separately to avoid the voltage difference.

If you want to expand your battery bank capacity, parallel connection is a better way without charging issues.

Despite the automatic balancing function, please avoid excessive voltage differences between parallel batteries to avoid triggering the overvoltage protection.

In parallel battery banks, the cables between each battery should be of equal length to ensure that all batteries in the system can work equally together.

It is not recommended to connect more than 4 batteries in parallel to ensure the normal functioning of auto balance.

The series connection means that the negative-electrode of the first lithium battery is connected to the positive electrode of the second lithium battery, and the negative electrode of the second lithium battery is connected to the positive electrode of the third battery, and so on, until the required voltage is reached.

The voltage of this connection method is all the total voltage of the cells connected together, and the string current rating keeps as single one battery.

—BMS FUNCTION

Over Charge Protection Voltage(>28.8V)

If an individual cell voltage exceeds a prescribed threshold during charging, the BMS will stop the charging.

Over Discharge Protection Voltage(<18.4V)

If an individual cell falls below the prescribed threshold during discharge the BMS will prevent further discharge when the battery voltage reaches over 21.6V, the battery will automatically reconnect after 15 seconds.

Charging High Temperature Protection

The BMS will not allow a discharging current if the internal temperature of the battery has reached 149°F (65°C).

Discharging High Temperature Protection

The BMS will not allow a discharging current if the internal temperature of the battery has reached 158°F (70°C).

Low Temperature Charging/Discharging

The BMS will not allow a charging current under 32°F (0°C) but will continue to discharge down to -4°F (-20°C).

Over Current/Short Circuit Discharge Protection

If the over current/short circuit protection is tripped, the BMS will shut the battery down and will remain disconnected until you remove the battery cables. While the battery cables are disconnected, we suggest taking the battery voltage with the use of a voltmeter. If it reads above 22V, reconnect the battery cables. If you are unsuccessful at obtaining a voltage reading above 22V, please contact our technical support team: hello@super-empower.com.

—APPLICATION EXAMPLES

Wide Application

- RV
- Solar Energy Storage
- Industrial Battery
- Used to Replace 12V Lead-acid Batteries
- Home Energy Storage & Power Wall
- Nautical Applications
- Fishing, Boating Electronics
- Ice Fishing
- Recreational Vehicle
- Off-grid Life
- Deep Circulation Application



—FAQs

What should I do if the battery is 0V?

Don't worry, if the battery is showing 0V this is potentially due to BMS protection. Please disconnect the battery cable from the load, test the battery voltage, if the voltage is more than 22V reconnect the battery cable. If the voltage is lower than 22V, please contact our technical team: hello@super-empower.com

Is it necessary to charge the battery out of the box?

Yes, you need to fully charge the battery.

NOTE: Please also fully charge the battery if you want to connect the batteries in series or parallel.

How can I check the battery voltage?

If you don't have a battery monitor, you can use a multimeter to monitor the voltage.

Can mount the battery in any position?

You can mount our battery in any position. Please make sure to secure and protect the terminals when mounting.

FOR MORE FAQs, PLEASE VISIT OUR WEBSITE:

www.super-empower.com

—WARRANTY AND RETURNS

Not covered by warranty:

- Damage caused by insufficient or improper fastening.
- Improper installation, use, maintenance, or service.
- Loose battery terminal connections.
- Series connection of more than 4 batteries (102.4V above) or parallel connection of more than 4 batteries.
- Reverse polarity connection.
- Improper storage conditions defined in the battery user manual.
- Any short circuit caused by accidentally, intentionally, or unintentionally connecting the positive and negative terminals.
- Damage caused by impact, accidents, collisions, or drops.
- Insufficient/overcharging of the battery as defined in the battery user manual.
- Use in conjunction with other third-party products.
- High resistance caused by terminal corrosion, poor crimping, or undersized cables.
- Battery failure caused by electrical system malfunctions.
- Modification of the product without the explicit written consent of the manufacturer.
- Use of the battery for applications beyond its design and intended use, including repeated engine starting or consuming more amperes than the battery's rated continuous discharge to meet their respective specifications.
- Batteries left uncharged for more than 1 year batteries should to be charged regularly).

- Batteries used in commercial applications that cycle to a discharge depth of 80% or more within 24 hours.
- Force majeure, including fires, typhoons, floods, or earthquakes.
- Buyers are responsible for any damage caused by improper operation or misuse of our products and or failure to follow safety guidelines.

After-sales Service

If you need any after-sales service for the product, please contact hello@super-empower.com. We will provide you with the necessary assistance.

How to Store the Battery?

We recommend bringing the Batteries to a 50% state of charge. Then, disconnect the battery from any loads by removing the negative cable from one battery. On average, the batteries lose <3% capacity per month at 77°F (25°C).

This is subject to increasing if stored in extreme environmental conditions.

Disposal and Recycling

Ensure that the battery is properly disposed of in accordance with the laws and regulations in your area.

This product contains lithium-ion batteries and other recyclable materials.

We strongly encourage our customers to recycle used batteries.

*SUPER EMPOWER reserves the right to
update all product data sheets at any time.
Consult SUPER EMPOWER marketing
specialists for publication updates at
hello@super-empower.com*

*Copyright©2018–2025 SOLTECH LLC,
All Rights Reserved.*



"WE EMPOWER WATT MATTERS"

www.super-empower.com